ABSTRACT

A circuit for generating a component of n-th order includes: six differential amplifiers (15A to 15F) having a pair of input terminals supplied with a common linear input 5 signal and a constant level signal of a predetermined level, outputting a reversed or non-reversed signal to the linear input signal, and having a limiter function to limit the output signal to a predetermined maximum value and a minimum value; 10 a constant level signal generation circuit for supplying the constant level signal to each of the six differential amplifiers; a current mirror circuit (14) for controlling current flowing in the differential amplifiers (15A to 15F); and addition resistors (16A, 16B) for adding the output current of the differential amplifiers (15A to 15F). By increasing 15 the flowing current by the sixth differential amplifier (15F) so as to increase the resistance value, it is possible to obtain a highly accurate output current of a component of a 5-th order function having more precipitous inclination with respect to 20 the input signal.

(12)特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関 国際事務局



(43) 国際公開日 2004年3月25日(25.03.2004)

PCT

(10) 国際公開番号

(51) 国際特許分類7:

WO 2004/025824 A1

H03B 5/32, G06G 7/20

(21) 国際出願番号:

PCT/JP2003/010853

(22) 国際出願日:

2003年8月27日(27.08.2003)

(25) 国際出願の言語:

日本語

(26) 国際公開の言語:

日本語

(30) 優先権データ:

特願2002-248932 2002年8月28日(28.08.2002) л


(71) 出願人(米国を除く全ての指定国について): 旭化 成マイクロシステム株式会社 (ASAHI KASEI MI-CROSYSTEMS CO.,LTD.) [JP/JP]; 〒163-1031 東京都 新宿区 西新宿三丁目 7番 1号 Tokyo (JP).

- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 川崎 巻子 (KAWASAKI,Takako) [JP/JP]; 〒243-0004 神奈川県 厚木市 水引 1-1 2-2 0-1 0 3 Kanagawa (JP). 根 本 謙治 (NEMOTO, Kenji) [JP/JP]; 〒228-0804 神奈川 県 相模原市 旭町 2 2-1 O Kanagawa (JP).
- (74) 代理人: 森哲也, 外(MORI, Tetsuya et al.); 〒101-0032 東京都 千代田区 岩本町二丁目3番3号 友泉岩本町 ビル 8階 日栄国際特許事務所 Tokyo (JP).
- (81) 指定国(国内): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO. NZ. OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,

[続菜有]

(54) Title: DEVICE FOR GENERATING FUNCTION OF APPROXIMATE n-TH DEGREE AND TEMPERATURE COMPEN-SATION QUARTZ OSCILLATION CIRCUIT

(54) 発明の名称: 近似 n 次関数発生装置及び温度補償水晶発振回路

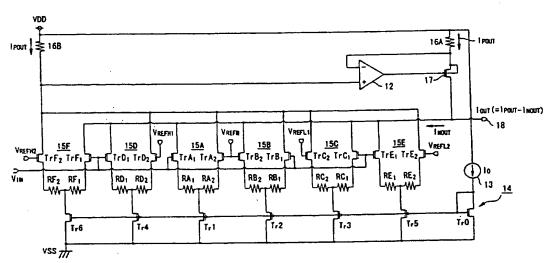

(57) Abstract: A circuit for generating a component of n-th degree includes: six differential amplifiers (15A to 15F) having a pair of input terminals supplied with a common linear input signal and a constant level signal of a predetermined level, outputting a reversed or non-reversed signal to the linear input signal, and having a limiter function to limit the output signal to a predetermined maximum value and a minimum value; a constant level signal generation circuit for supplying the constant level signal to each of the six differential amplifiers; a current mirror circuit (14) for controlling current flowing in the differential amplifiers (15A to 15F); and addition resistors (16A, 16B) for adding the output current of the differential amplifiers (15A to 15F). By increasing the flowing current by the sixth differential amplifier (15F) so as to increase the resistance value, it is possible to obtain a highly accurate output current of a component of a 5-th degree function having more precipitous inclination with respect to the input signal.

(57) 要約:対の入力端子に共通の1次の入力信号及び所定レベルの定レベル信号が個別に入力され、前記1次の入 力信号に対して反転又は非反転信号を出力すると共に、出力信号を所定の最大値及び最小値で制限するリミッタ機 能を有する複数6個の差動増幅器15A~